



Features:

- Made completely from PP
- Available in different sizes and highness
- Available filtration rates 3-10-30 micron
- Filter area of each single elements from 1,5 to 8 m²
- Cartridges sealing by double O-Ring
- Washable and reusable up to 10 times

Advantages:


- Inert to most of acid and alkaline chemical products
- It permit to be hold in several filter chambers
- Guarantee of quality of filtered product, suitable for different type of filter baths
- High flow, low pressure losses, high retention holding capability
- Perfect sealing, zero flow by pass
- Low cost

Applicazioni:

- Plating baths
- Degreasing baths
- Rinsing baths



Available in different sizes

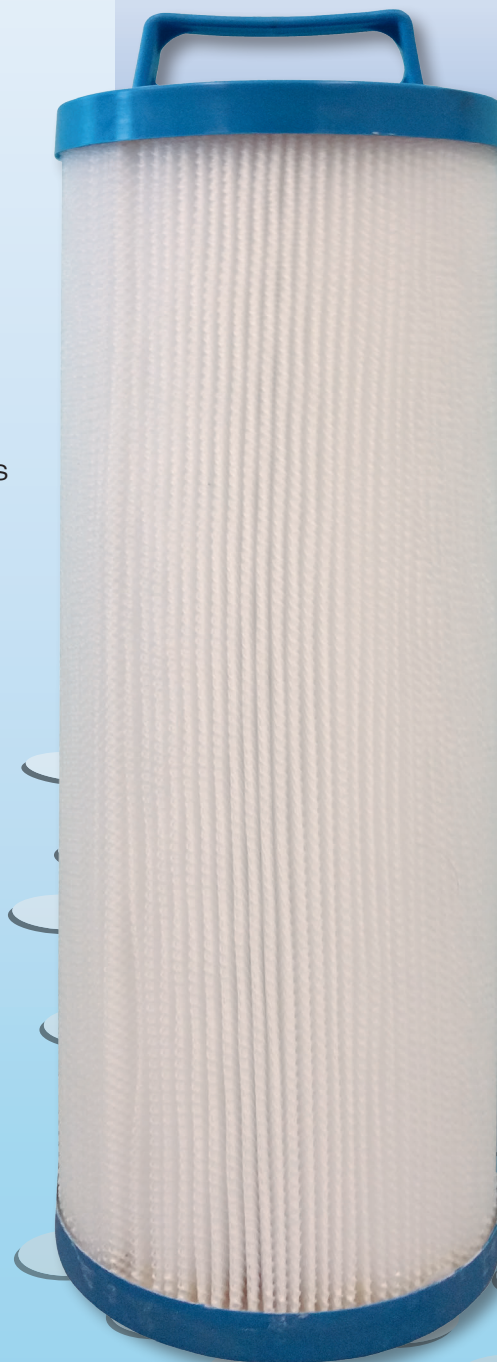



CARTRIDGES CODE						
SERIES	MATERIAL	HEIGHT	DIAMETER mm	FILTRATION RATE	O-RING MATERIAL	A m ²
JB	P= PP	1=10"	A= D150	03=3micron	E= EPDM V= Viton	1,5
		2=20"		10=10micron		3
		3=30"		30=30micron		4,5
JB	P= PP	1=10"	B=200	03=3micron	E= EPDM V= Viton	2,5
		2=20"		10=10micron		5
				30=30micron		
JB	P= PP	1=10"	C=250	03=3micron	E= EPDM V= Viton	4
		2=20"		10=10micron		8
				30=30micron		